
AVENTIS HDP

COLOR BODY PORCELAIN FLOOR & WALL TILE



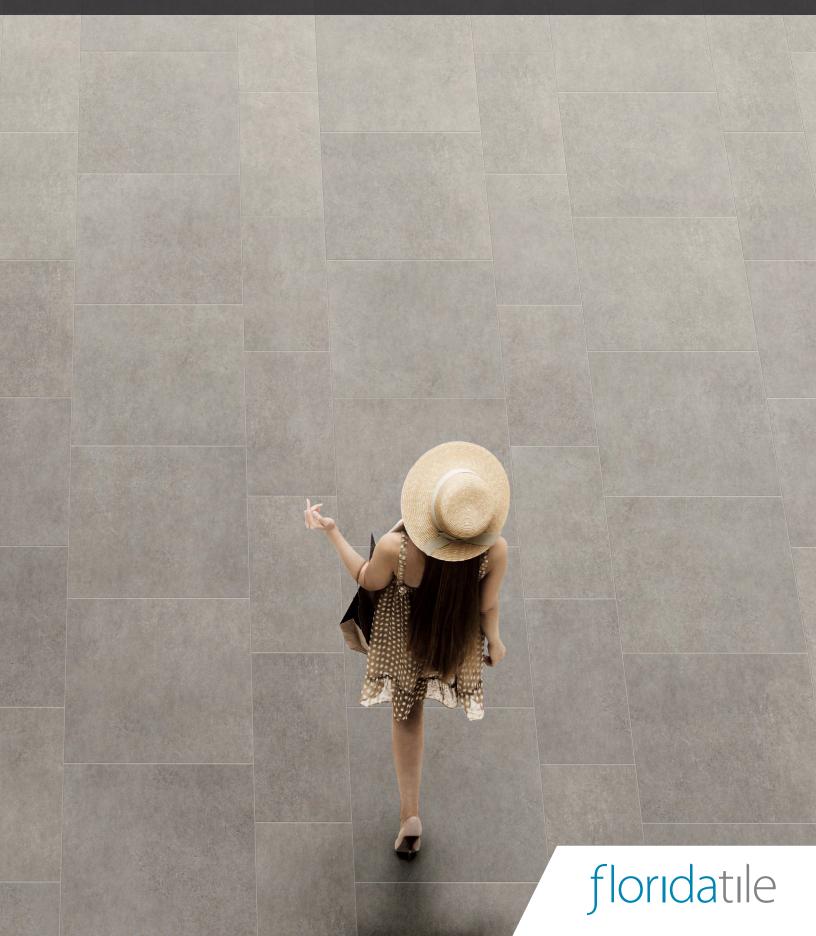

shown on front: AT3RF 12x24 & 24x24 Titanium

Inspired by the grit of urban landscape, Aventis^{HDP} exemplifies contemporary design. A concrete look with a six-color palette of striking beiges, greys, and olives, this collection propels a spirit of minimalism into focus. Understated shade variations deliver a monochromatic tone while a smooth, yet tactile surface allows the slightest shimmer of reflection. This sleek collection creates lasting sophistication for any high-traffic space.

With large-scale commercial or contemporary residential installations in mind, Aventis^{HDP} color body floor and wall tile is engineered for optimal durability and performs to the highest industrial standards of certified porcelain. Both 12x24 and 24x24 formats are rectified. A 3x12 bullnose and 25-piece mosaics in every color complete the collection.


Manufactured using proprietary HDP—High Definition Porcelain® printing technology, Aventis^{HDP} is appropriate for most residential and commercial settings. It is made in the USA at our Green Squared® certified Advanced Manufacturing Center in Lawrenceburg, KY, and includes pre-consumer recycled content. It meets the DCOF AcuTest® requirements to be installed in wet areas and is GREENGUARD® and Porcelain Tile certified.

below: ATORF 24x24 Eclipse





COTTON



AT5RF 24x24 Cotton



AT5RF 12x24 Cotton



AT5RA/M12 Cotton 25pc Mosaic

TITANIUM




AT3RF 24x24 Titanium



AT3RF 12x24 Titanium



AT3RA/M12 Titanium 25pc Mosaic



AT1RF 24x24 Ask



AT1RF 12x24 Ask



AT1RA/M12 Ask 25pc Mosaic

VELVET



AT2RF 24x24 Velvet



AT2RF 12x24 Velvet



AT2RA/M12 Velvet 25pc Mosaic



AT4RF 24x24 Nut



AT4RF 12x24 Nut



AT4RA/M12 Nut 25pc Mosaic


ECLIPSE



ATORF 24x24 Eclipse



ATORF 12x24 Eclipse



ATORA/M12 Eclipse 25pc Mosaic



above: AT1RF 24x24 Ask

Porcelain Technical Data Properties (Floor)	ASTM®	ANSI®	Results ¹
DCOF AcuTest ^{®2}	A137.1	≥ 0.42	Pass
Surface Hardness	Mohs Scale	N/A	7 Mohs
Break Strength	C-648	≥ 250 lbf.	≥ 410 lbf. avg.
Water Absorption	C-373	≤ 0.5%	≤ 0.5%³
Intended Use ⁴	N/A	N/A	Residential Light Commercial Heavy Commercial

¹ Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

Typical Uses

Aventis^{HDP} color body porcelain floor and wall tile is appropriate for most residential and commercial wall, countertop, backsplash, and most floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications, or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI® A137.1) for ceramic, stone, and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.

Color, texture, and finish variations may occur due to the nature of the product.

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.

Country of origin and other product features and characteristics are subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin and other product characteristics.

Field Tile Nominal Size (in) ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ^{3,4}	Edge
12x24	30x60	.5	9mm	Rectified
24x24	60x60	.25	9mm	Rectified

¹These values may vary from lot to lot.

⁴ In order to enhance manufacturing efficiencies the thickness of this product has been modified. During implementation of this modification, products with original thickness may still be available. Please contact customer service to confirm the thickness of your product at time of order.

Trim	Shape	Sku	Nominal Size (in) ¹	Metric (cm)
Bullnose		P43C9	3x12	7.5x30

¹These values may vary from lot to lot.

Color Variation				
	V2 Slight Variation Clearly distinguishable differences in texture and/or pattern with similar colors.			















ANSI® A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest® value of 0.42.

³ Average production value.

⁴ Please visit www.floridatile.com/intended-use for further details.

²These values are based on actual sizes including the grout joint.

³ May not apply to textured surfaces or tiles with uneven back patterns such as mesh mounted